


**AD-A242 650**

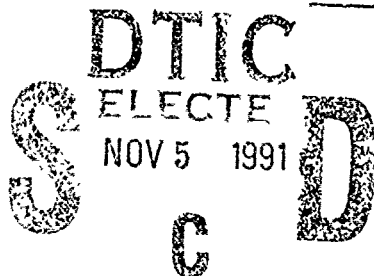

**NEURAL NETWORK AND FUZZY LOGIC  
TECHNOLOGY FOR NAVAL FLIGHT CONTROL  
SYSTEMS**

Marc L. Steinberg  
Robert D. DiGirolamo  
Air Vehicles and Crew Systems Technology Department (Code 6012)  
NAVAL AIR DEVELOPMENT CENTER  
Warminster, PA 18974-5000

AUGUST 1991

INTERIM REPORT  
Period Covering September 1990 to July 1991  
Task No. RR 22-41  
Project No. NA1B  
Work Unit No. 4.6  
Program Element No. 62122N

*Approved for public release; distribution is unlimited*

Prepared for  
OFFICE OF NAVAL TECHNOLOGY  
Arlington, VA 22217-5000

**91-14925**




**91 1104 026**


## NOTICES

**REPORT NUMBERING SYSTEM** — The numbering of technical project reports issued by the Naval Air Development Center is arranged for specific identification purposes. Each number consists of the Center acronym, the calendar year in which the number was assigned, the sequence number of the report within the specific calendar year, and the official 2-digit correspondence code of the Command Officer or the Functional Department responsible for the report. For example: Report No. NADC-88020-60 indicates the twentieth Center report for the year 1988 and prepared by the Air Vehicle and Crew Systems Technology Department. The numerical codes are as follows:

CODE	OFFICE OR DEPARTMENT
00	Commander, Naval Air Development Center
01	Technical Director, Naval Air Development Center
05	Computer Department
10	AntiSubmarine Warfare Systems Department
20	Tactical Air Systems Department
30	Warfare Systems Analysis Department
40	Communication Navigation Technology Department
50	Mission Avionics Technology Department
60	Air Vehicle & Crew Systems Technology Department
70	Systems & Software Technology Department
80	Engineering Support Group
90	Test & Evaluation Group

**PRODUCT ENDORSEMENT** — The discussion or instructions concerning commercial products herein do not constitute an endorsement by the Government nor do they convey or imply the license or right to use such products.

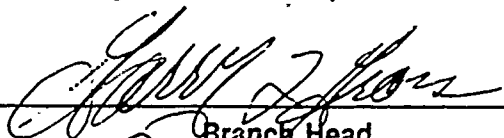Reviewed By:  Date: 9/6/91  
Branch Head

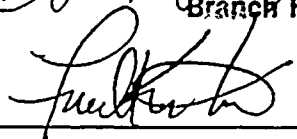Reviewed By:  Date: 9/20/91  
Division Head

Reviewed By:  Date: 9/20/91  
Director/Deputy Director

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.</small>				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE 1991 06 Aug	3. REPORT TYPE AND DATES COVERED Interim (Sept 1990 - Jul 1991)		
4. TITLE AND SUBTITLE  Neural Network and Fuzzy Logic Technology for Naval Flight Control Systems		5. FUNDING NUMBERS  TA RR 22-41 PR NALB WU 4.6 DE 62122N		
6. AUTHOR(S)  Steinberg, Marc L. DiGirolamo, Robert D.		8. PERFORMING ORGANIZATION REPORT NUMBER  NADC-91080-60		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  Naval Air Development Center (Code 6012) Warminster, PA 18974-5000		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
9. SPONSORING, MONITORING AGENCY NAME(S) AND ADDRESS(ES)  Office of Naval Technology Arlington, VA 22217-5000		11. SUPPLEMENTARY NOTES		
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Approved for Public Release; Distribution Unlimited		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words)  Neural networks and fuzzy logic have the potential to overcome some of the most difficult problems that occur in the design and implementation of modern Flight Control Systems (FCS). Ultimately, this may yield significant gains in performance, robustness, cost survivability and reliability. However, it is still uncertain what neural network and fuzzy logic functions are both technologically feasible and suitable for flight control system implementation. In this report, an ongoing comprehensive program to develop and assess this technology for Naval FCS applications is described. Currently, this program is focused on the development of a neural network FCS design tool, a neural network flight control law emulator, a fuzzy logic automatic carrier landing system and a neural network flight control configuration management system. For each project, some initial results are given. Also, several new and planned projects are discussed. These include learning augmented adaptive control, neural network augmented nonlinear control, optical neurons and neural augmentation of conventional control systems.				
14. SUBJECT TERMS Neural Network, Fuzzy Logic, Flight Control System, Automatic Carrier Landing System, Control Law, Learning Control and Radial Basis Function			15. NUMBER OF PAGES 45	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT  Same as Rpt	

# TABLE OF CONTENTS

1. Introduction . . . . .	1
2. Neural Network Flight Control Law Syntheses . . . . .	7
3. Fuzzy Logic Automatic Carrier Landing System . . . . .	10
4. Neural Network Control Law Emulator . . . . .	13
5. Neural Network Configuration Management . . . . .	16
6. Future and Recently Begun Efforts . . . . .	17
7. Conclusions . . . . .	19
8. References . . . . .	20
9. Figures . . . . .	23



Accession For	
NIS GRAAI	<input checked="" type="checkbox"/>
OPIC TEB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
by	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

## LIST OF FIGURES

1. Control Law Synthesis Method . . . . .	23
2. F/A-18 Responses Before Training at .8M, 40,000 ft. . . . .	24
3. F/A-18 Responses After Training at .8m, 40,000 ft. . . . .	25
4. F/A-18 Responses Before Training at .65M, 20,000 ft. . . . .	26
5. F/A-18 Responses After Training at .65M, 20,000 ft. . . . .	27
6. Fuzzy Logic Carrier Landing System . . . . .	28
7. Position Response to High Slope and Fast Sink Rate . . . . .	29
8. Sink Rate Response to High Slope and Fast Sink Rate . . . . .	30
9. Response to Slightly Low and Far from Carrier . . . . .	31
10. Representative Control System . . . . .	32
11. Emulator Response for Uncorrelated Random Inputs . . . . .	33
12. Emulator Response for Internal Variable . . . . .	34

## I. Introduction

Modern military aircraft must be capable of performing many diverse missions under an exceptionally wide variety of flight conditions. This need has generated a constant increase in demands for agility, speed, precision, and survivability. As a result, the role of the FCS has expanded well beyond the traditional one of augmenting stability and controllability with very limited authority[1-2]. On current aircraft such as the F/A-18, F-16, and the F-22, the FCS has already taken on the role of a full authority system that largely determines effective vehicle dynamics. In the future, many high performance military aircraft will critically depend upon the capabilities of advanced flight control systems. This is particularly true for aircraft designs that incorporate supermaneuverability, low observability, relaxed aerodynamic stability, reduced structural stiffness, and vertical take-off/landing. Future aircraft will also increase the complexity of the FCS with the need to manage large numbers of control effectors including new forms of control such as thrust vectoring vanes or vortex control. In addition, the FCS will be used to implement complex functions that are possible because of the wealth of information available over common avionics data buses. This will include completely new functions such as impairment detection and control system reconfiguration after hardware failures and battle damage, and integration of numerous subsystems such as propulsion, weapons, and structural control. Yet, even today's flight control systems are burdened by the lack of effective control law design techniques, expensive and lengthy software development cycles, and the limited processing power available on most aircraft. Thus, while there has always been considerable interest in creating better approaches to the design and implementation of flight control systems, there is currently more need for them than ever.

As current research suggests, neural network and fuzzy logic based approaches to control may have substantial benefits in performance, robustness, reliability, and cost. This has been demonstrated for a variety of systems[3-8] including some initial work with

aircraft[9-16]. For this reason, the Naval Air Development Center began a comprehensive program in 1989 to develop and assess neural network technology for Naval FCS applications[16,18,20-21]. Our approach throughout this program has been to avoid the widely used neuro-control "black box" techniques in which the type of system being controlled is considered unimportant. Blindly applying generic neural control techniques to aircraft is unlikely to have any more success than previous applications of generic control theoretic techniques. Flight control systems are in many ways a unique subset of control systems. They require carefully considered and well thought out approaches tailored to their particular characteristics and requirements[16]. Any less may provide an interesting demonstration of the power of neural networks, but is unlikely to see real use on a production aircraft.

The largest obstacle in the transition of neural network based approaches into production aircraft is system validation. System validation is absolutely essential due to the criticality of the FCS, the conservatism of the aircraft community, and the skepticism directed towards neural networks. Yet, to achieve this validation will likely require the formation of new techniques, much in the way techniques have been developed over the past few decades for digital flight control systems. Therefore, the goal of the present phase of our work is not only to prove that neural network based approaches are feasible, but also to develop neural network based approaches that can meet the flight safety requirements for implementation on manned aircraft. To achieve this goal, we have three major in-house efforts, three contracted efforts, and plans for additional contracted and in-house efforts. This report will describe these efforts and give some initial results. It will also attempt to provide some insight into the full scope of the problems and limitations affecting the design and implementation of current military flight control systems.

Aircraft are time-varying non-linear dynamic systems with six degrees of rigid body freedom and numerous aeroelastic modes. These dynamics vary considerably over a large

range of flight conditions and are often altered by configuration changes. Even without these changes, the best aircraft math models are often highly uncertain, and some areas of the flight envelope are never well understood. Among dynamic systems, aircraft hold an interesting distinction of being one of the few systems that may be deliberately designed to have very fast open loop unstable modes for the sake of maneuverability. For example, the X-29 was designed with an instability that has a time to double amplitude of only about an eighth of a second. One result of these fast instabilities, beyond the increasing dependence of the aircraft on the FCS, is to make rate and position saturating non-linearities take on an exceptional amount of importance. This is particularly true since the aircraft environment has one of the richest varieties of substantial magnitude disturbances found in any controlled dynamic system. In addition to the more obvious limits set by control effector saturations, there are other often unanticipated limits. These are generally caused by either the aircraft's structural bending modes or the wide range of air flow characteristics that can occur over individual control surfaces. This can place limits on controller bandwidth and cause loss of effectiveness or even reversal of control inputs in some flight conditions.

In any case, the most notable difference between the FCS and other control systems is the role of the pilot. The pilot is not the classical control operator who chooses set points and lacks substantial effect on the dynamic characteristics of the closed loop system. Instead, the pilot must be treated as a highly adaptive element within the loop. Pilots are even capable of producing poor damping, limit cycles, and instabilities when attempting to control aircraft with marginal closed-loop characteristics. Further, the dynamic response of the system must be tailored toward what the pilot wants (such as mission tailored flying qualities) and not what seems best from basic control criterion.

Given the wide range of factors described above, it is not surprising that no single methodology can incorporate even a substantial number of the important features needed

to be considered in design. Designs are extremely labor intensive and require costly ad hoc trial and error adjustment during piloted flight simulation. Even then, all major aircraft flight control systems have had deficiencies that were only discovered in flight tests. Also, given the increasingly complex requirements on the FCS, if many factors are not dealt with early in the design process, the result will definitely be aircraft that cannot achieve their full potential. Using neural networks to resolve some of these complex design issues and create designs with better performance for less labor and cost is the goal of our neural flight control law synthesis project[18]. A complete description of this project along with some initial results is given in section II.

With neural control law synthesis, the structure of the FCS, itself, remains conventional. However, conventional flight control systems sometimes perform poorly in situations where human pilots possess techniques that perform well. This often occurs due the pilots ability to intelligently alter control strategies and plan ahead for future events. One example of this type of situation involves automatic carrier landing systems(ACLS)[19]. The ACLS is designed to track glideslope. However, the real problem is not to track glideslope, but to have the proper terminal conditions at the carrier. For this reason, our second in-house project involves creating a new form of automatic carrier landing controller using a hybrid neural network/fuzzy logic approach. This approach will incorporate Naval fighter pilot knowledge, Naval control engineer knowledge, and unsupervised neural network learned airframe knowledge into the controller[20]. One major advantage of this type of controller is that it can be expressed as a set of parallel English rules. This provides a transparency that can ease the validation process and readily adapt to pilot criticisms during flight testing. A full description of this project with some initial results is given in section III.

Current control laws have become exceptionally complex, and often require substantial software development after the completion of FCS simulation. They also require a

considerable amount of software support throughout the life of the aircraft. This is due not only to the complexity of the control law, but also to the high iteration rates required by modern aircraft. Achieving acceptable rates within available throughput often leads to considerable difficulty with problems like delays from subtle multi-tasking errors. Neural networks, however, have the computational efficiency and speed to calculate immensely complex control laws rapidly if they are implemented in specialized hardware. They also can train directly from the software simulator to eliminate significant software development and supports costs. In addition, they may incorporate some hardware robustness benefits such as graceful degradation after damage. Therefore, our third in-house program involves emulating an existing flight control law with a neural network[21]. A description of this project with some initial results is given in section IV.

Another important issue concerns adverse dynamics that can occur during configuration changes. This is an area that is becoming much more important as the FCS becomes "tailored" to individual mission and tactical segments. Also, reconfiguration after battle damage or hardware failures has recently become a much more viable possibility with the completion of flight tests for a prototype system by the Air Force[22]. A contracted effort by Systems Technology, Inc. and STR is attempting to apply neural networks with on-line learning to this problem as described in section V[23].

Finally, section VI will briefly discuss recently begun and planned efforts. The recently begun efforts are learning augmented adaptive control[31] and neural network augmented nonlinear control theory methods. Both these projects center on advanced techniques that use neural networks for several features including on-line learning to overcome the uncertainty associated with the flight control design process. Ultimately, this type of on-line learning may be necessary to avoid trading performance for robustness or performing large amounts of on-line tuning.

The planned efforts are neural network/fuzzy logic augmentation systems and optical neurons. Augmentation systems may provide great benefits, but allow easy validation since

they can be of limited authority and analyzed as a disturbance to a conventional flight controller. Optical neurons may provide an excellent way to implement neural networks. This will be followed, in section VII, with our conclusions.

## II. Neural Network Flight Control Law Synthesis

Work in neural control law synthesis is being done under an NADC Independent Exploratory Development(IED) program. The overall objective of this program is to incorporate emerging neural network technology into a feasible concept that will simplify and improve flight control system development. As briefly mentioned in the introduction, the flight control law design process is a very lengthy and complicated one. The engineer begins with an uncertain nonlinear model determined only from wind tunnel testing and computational fluid dynamics. A baseline structure that defines the feedback parameters and compensations for the FCS is then developed based on the aircraft's predicted features, flying qualities requirements, and proposed mission requirements. Next, the engineer linearizes the aircraft model at various points in the flight envelope and applies combinations of classical and modern linear control theories to generate controller gains and filter time constants. The final nonlinear control law is obtained by switching or interpolating between these separate linear controllers as a function of a small number of parameters. Limited parameters are used since additional ones would require excessive memory requirements due to the dimensionality of the associated look up tables. Essentially, the engineer has created a discrete nonlinear mapping of design points in the aircraft envelope into sets of desired control system gains. This drawn-out design technique, however, limits the total number of trim points the engineer can investigate for a given aircraft due to the high amount of labor associated with each design. Also, since it relies heavily on uncertain linear approximation models to represent the aircraft, it often yields unsatisfactory results, particularly when the aircraft is subject to large motions. So far, robust controller design techniques such as  $H_\infty$  and  $\mu$  Synthesis or nonlinear techniques like feedback linearization offer the best chance for solving some of these problems. Still, due to the difficulty of expressing complex aircraft design features in a mathematically tractable form, all current techniques will both neglect some factors and overdesign for others. Piloted handling qualities, in particular, have proven extremely difficult to incorporate in any technique.

Our approach to the design problem is to use neural networks to synthesize the continuous nonlinear functional mapping between aircraft design points and control system gains and time constants. As has been proven, many neural networks are capable of doing this for almost any complex relationship with a large number of inputs and outputs. Therefore, we are not limited to a small number of parameters as the basis for scheduling gains, but can use additional rapidly changing aircraft parameters like angle of attack and sideslip. The neural network may allow us to determine the important relationships between these quantities without significantly complicating the process. Some additional anticipated benefits are the reduced labor and expense required to develop flight control laws, and the increased number of design points used in the flight envelope. Furthermore, the neural network may provide significant insights into how the scheduled points should be distributed throughout the flight envelope. It may point out better interpolation functions to be used between these scheduled points. Also, the designs themselves may be more optimal due to the use of performance indices that are far too complex to be used in any mathematical setting. These indices may also finally allow inclusion of adequate pilot handling qualities criterion.

Our current approach is illustrated in Fig. 1. Here, pilot inputs are supplied to both the augmented aircraft model and a set of desired performance models. The performance models exemplify various desired maneuvering characteristics of the aircraft and depend primarily on the type of aircraft, the current mission requirements, and the level of flying quality sought. Typical maneuvers such as pitch doublets and rolls are performed at each design point in the envelope. When the maneuvers are completed, a cost function is used to "grade" the controller with respect to the performance models. The "grade" is then used to adjust the weights and biases in the neural network and produce new parameters for the controller at each design point. The new parameters enable the augmented aircraft to achieve responses that more closely match those of the ideal performance models. The

process is then repeated until the "grade" falls below a specified tolerance and the proper controller gains have been determined.

This neural network approach has three main advantages over the standard neural control techniques. First, the neural network only designs gains and time constants for a known control law structure. Implementation of the control law, including verification and validation, proceed using established methodologies. Secondly, the speed and efficiency of the training algorithm is not critical to the success of the procedure since it is all done off-line. Finally, it could readily be transitioned into an on-line neural gain scheduler for existing and future flight control hardware. This on-line approach would have great performance benefits due its literally infinite number of scheduled gains. Also, it could easily schedule gains on many parameters including rapidly changing ones. This could also be done as a limited authority neural augmentation system instead of a full gain scheduler. The benefit of an augmentation system being that the neural network outputs can be limited and treated as a disturbance to allow simpler validation.

Current work is centered on a nonlinear F/A-18 longitudinal aircraft model with data for the full maneuvering envelope. The reference performance model being used is based on an actual high performance jet aircraft which has been augmented to meet MIL-F-8785C[24]. The neural network choses six gains and one time constant in the F/A-18 pitch control system. The neural networks being used are standard feedforward sigmoidal networks with adaptive back-propagation learning and the Cerebellar Model Articulation Controller(CMAC) network[25-26]. Initial results with standard feedforward networks have been good. Fig. 2 compares desired and actual angle of attack, pitch rate, and normal acceleration responses to a specific stick input before training for .8M at 40,000 ft. Fig. 3 shows the same responses after neural network training. Similarly, Fig. 4 shows responses before training at .65 M at 20,000 ft. that can be compared with after training responses in Fig. 5. These plots demonstrate that the neural network is able to schedule gains to greatly improve the performance and handling qualities of the aircraft.

### III. Fuzzy Logic Automatic Carrier Landing System

Carrier landings are one of the most difficult and unforgiving tasks that are routinely undertaken by jet aircraft[19]. Modern jet aircraft are difficult to handle at low approach speeds and must be brought down onto a small moving target in the presence of large disturbances. Basic feedback techniques have many limitations, particularly in their response to small maneuvers, carrier motion, atmospheric turbulence, and carrier air wake turbulence. The main reason for these problems is that a standard ACLS is only concerned with tracking glideslope, whereas the real goal is to have the correct terminal condition. Human pilots have successful techniques for dealing with these situations, although they do not have the speed, response capabilities, consistency, and precision of automatic systems. Therefore, the goal of this task is to use fuzzy logic and neural network techniques[4,27] to create an automatic system that utilizes human knowledge, automatic control techniques, and knowledge derived directly from the airframe through unsupervised neural network learning techniques. This controller would then be able both to initially incorporate human knowledge, and to be easily changed to reflect pilot criticism during flight testing and simulation.

Originally, in an attempt to be fair to the current ACLS, the fuzzy system is only being given the same inputs that are given to the conventional ACLS. This must be done since additional inputs could improve standard feedback ACLS performance. Several possible strategies that incorporate varying degrees of fuzzy human knowledge, neural network airframe knowledge, and basic ACLS structure knowledge are being tested on a six degree of freedom non-linear simulation of an F/A-18. The model has gust, carrier air wake, and sensor noise models. It also has rate and position saturations on the engine and actuator models.

The initial controller developed was the system of Fig. 6, using only Navy controls engineer knowledge on proper feedback techniques for carrier landing, and Navy fighter

pilot knowledge on carrier approach flying techniques. For the initial approach phase of 8000-4000 ft. to carrier, the fuzzy system has about the same integrated glideslope error as the current system, but decreases the number of aborted approaches or wave-offs, by 48 percent. The reason for this is that the fuzzy system is excellent at making rapid maneuvers with little overshoot, and it does not just track glideslope. For example, if the aircraft is a little high before entering the carrier air wake, the fuzzy system will make no changes and allow the settling effect of the airwake to correct glide slope position. Fig. 7 shows the response of the fuzzy system to a high position and very high sink rate condition. The system is trying to return to a sink rate of about -14.5 ft/sec when it hits the glide slope. Fig. 8 shows the fuzzy system can make the adjustment to sink rate with fast rise time and almost no overshoot. This same situation led to a wave-off by the conventional ACLS. Fig. 9 shows a low condition far from the carrier. In this case, instead of just tracking glide slope, the fuzzy controller waits until intersection. This prevents wasting control power making an unnecessary quick return to glideslope.

The major effort at the moment is on completing the controller for the full approach, and performing extensive analyses on it. After this, neural network derived rules will be added to the system to see if improvements are possible. The new controller will be given additional inputs such as weather condition to see if this yields improvements. Also fuzzy pilot or mission computer supplied inputs will be included such as fuzzy stores information. Instead of having to modify control gains every time a new configuration is created, the pilot could just specify, for example, that there was a medium size store about half way out on the wing. Additionally, fuzzy damage information might be input by the pilot. Even with both the pilot's awareness and the best damage detection techniques available, it is still difficult to determine the extent and type of many failures. Nonetheless, it is easy for the pilot to specify, for example, that the plane is only rolling about half as fast as normal. This input might allow an impaired aircraft to land safely. Following this,

work on real-time on-line learning will begin. The modularity of this type of network makes learning quick and efficient. Also, since only a few of the fuzzy associations fire at any given time, learning does not change the total network and override much previously learned knowledge.

#### IV. Neural Network Control Law Emulator

The main benefit of using a neural network to emulate an existing flight control law is its capability of removing large software development and supports costs. The remaining costs would only be those involving redundancy management, built-in-test, and other associated functions of the flight control computer(FCC). Also, its fast and efficient computation would allow much more complex control law structures to be used. The neural FCC could be physically robust depending on the type of network used. This type of graceful degradation may help supply the degree of safety needed for all critical flight control components. There are three primary problems associated with implementing this neural network approach. The first is the validation problem that has been discussed throughout this paper. The second is the need for fast predictable learning times and fast validation to incorporate changes that need to be made to the system during flight tests. Replacing software development time with months of learning time, and repeated Monte Carlo simulation for validation would not be an improvement. The final problem is the FCC's use of dynamic control laws. It is unlikely that a static control law, even a very complex one represented by a feedforward neural network, could ever adequately control an aircraft. Therefore, recurrent networks seem the best possibility. However, feedforward networks are already extremely difficult to validate, and recurrent ones are orders of magnitude more difficult since they need to be validated through time as well as space. Thus, the basic strategy is to use a network with additional outputs that represent intermediate flight control law states and make them inputs after a one time frame delay. This would also allow many quick changes to be made to the network during flight tests without retraining the network since all inputs and internal states are available for digital computer manipulation. In addition, it is also much more transparent to analysis than a more arbitrary feedback system.

To perform this feedforward mapping, a large number of neural techniques were

examined. The majority of these fall in an unexplored area between statistical regression, systems identification, and table look-up schemes. The architectures and learning paradigms which were tested include standard sigmoidal networks with adaptive back-propagation learning, CMAC networks[25-26], radial basis networks[28], and various hybrid approaches[29-30 for example]. Each architecture was tested under a large number of design iterations to determine the best structural parameters and learning methods that could be reasonably achieved. Best results were attained by avoiding the "black box" approach, and modifying neural network structures to take advantage of available knowledge about the flight control law. Three basic features were determined to be very useful for a neural network to best perform this mapping problem. The first was the use of neurons with spatially local receptive fields. This is necessary since most training techniques converge only to small mean errors and require excessive training times to capture local features. These small local errors ultimately lead to large drift over time due to the feedbacks. The second beneficial feature was the use of vector quantization to position the local neurons. This apportions more neurons in more complex areas of the space if it is done correctly. This is important not only for matching the complex areas of the space, but also for avoiding overgeneralization in simple areas of the space. The final beneficial feature was the use of discontinuities that could be adjusted during training. Without these, the neural network will literally tie itself into knots in an attempt to fit the sharp discontinuities and singularities found in this problem.

The above features were incorporated into a new hybrid architecture which could be trained relatively quickly with a combination of supervised and unsupervised techniques. This architecture, along with the aforementioned ones, was applied to the control system in Fig. 10, which is representative of the type of complexity found in modern flight control laws. This control system includes scheduled gains and biases, limits, integrators, filters, and mode logic switches. For each neural architecture that was tested, a considerable

amount of effort was spent on determining optimal network parameters and training techniques. This was necessary due to the lack of design guidelines for many of the examined networks. The results were that the new hybrid architecture had a significantly smaller error than the other architectures that were tested. The response of this architecture to uncorrelated inputs with a 10ms frame rate over 5 sec. is shown in Fig. 11. The reason there is no drift over time is due to the excellent matching of internal variables as shown in Fig. 12. Internal variables are matched well since this network was optimized more for internal variables than outputs. For this sample problem, the network has the accuracy to replace a flight control computer and requires only seventy neurons. Exact accuracy is not called for since a digital flight control computer typically has noisy inputs and sends outputs to actuators with analog loop closures that use 1 and 5 percent resistors and capacitors. The real goal is not to achieve exact duplication of the control law, but to achieve identical closed loop response characteristics of the aircraft. For the future, we are working on improving neural architectures for flight control law emulation, and achieving fast alteration and validation techniques. We are also concurrently applying the current architecture with some of the other more successful ones to a full complex flight control system.

## V. Neural Network Configuration Management

This program is a contracted effort to Systems Technology, Inc.(STI) and STR. The objective of this project is to explore the ability of artificial neural networks to identify and compensate for adverse dynamics that can be encountered during configuration changes of high performance aircraft. Configuration changes may occur in response to damage control, mission profile segment transition, and tactical mode change. The neural network will attempt to minimize the likelihood of false reconfigurations and optimize mission effectiveness following appropriate reconfigurations. The major focus of the initial phase of the project was on an experimental variant of the F/A-18 with stabilator and thrust vectoring damage. The neural techniques used were an adaptive clustering network which was placed parallel to a conventional controller and trained by feedback error learning. On-line learning was greatly enhanced for these networks with an algorithm that added new radial basis function neurons to the network on-line. The results thus far have shown that neural networks can intrinsically identify these failures and compensate for them within several seconds, but additional work will be necessary to judge how well neural networks can perform on the full problem.

## VI. Future and Recently Begun Efforts

Our other contracted efforts are from the responses to a Broad Agency Announcement on neural network based approaches to flight control for Naval fighter and attack aircraft. The first effort is learning augmented adaptive control which is being done by Charles Stark Draper Labs[31]. This program will attempt to develop special purpose neural network learning systems that can provide real-time on-line learning within a flight control system architecture. The approach will be applied to the control of a nonlinear six degree of freedom high performance jet aircraft model by designing with a simple model and evaluating how well the controller can adapt to the full model with on-line learning. The possibility of realizing successful on-line learning is greatly enhanced by the use of some innovative spatially local neural networks.

The second effort is to augment nonlinear control methods and is being done by Guided Systems Technology. The objective of this research is to demonstrate a method for design and implementation of high performance jet aircraft control systems that makes use of both neural networks and robust nonlinear control theory. Neural networks will be used to deal with model uncertainty in the design process and perform the mappings required in feedback linearization of the aircraft's dynamics[32]. This will be applied to a full six degree of freedom nonlinear F/A-18 High Alpha Research Vehicle(HARV) simulation.

We also have plans for in-house work in neural network and fuzzy logic augmentation systems(NNFLAS) to conventional flight control systems. The reason for using an augmentation system is that by limiting the authority of the NNFLAS, the neural/fuzzy component may be treated as a disturbance to the conventional system to allow easy validation. The benefits of such a system, however, may be to provide on-line learning through neural networks, and to provide improved handling qualities specifications through complex neural network cost functions and fuzzy logic rules.

Optical neural networks are of considerable interest since they avoid many limitations inherent in silicon neural network implementations and have exceptionally high processing

speeds. Also, for avionics systems, light based computing is of particular interest since it is immune to the high electromagnetic flux environment that may be encountered on aircraft. For these reasons, we are planning work in this area as well.

## VII. Conclusions

It is still too soon to judge whether neural networks will prove able to overcome any FCS problems in ways that are suitable for flight testing and eventual routine use. The programs presented here hope to bring neural networks based approaches to such a level. Following successful flight tests, of course, the way would be open for more unconventional and innovative approaches to neuro-control that may ultimately create controllers that are vastly different from current ones. However, at the moment most of our approaches are geared toward creating neuro-control systems that are constrained to behave similarly in function to current systems. Even the carrier landing study and configuration management study are more involved with augmenting existing systems than creating completely unconventional ones. The one area that has sufficient potential to justify much higher risk approaches is that of on-line learning. Even if on-line learning is not suitable for fleet aircraft, just having on-line learning available during flight testing or manned simulation could be incredibly valuable for the development process. For that reason, we are doing work in that area despite the potential problems, since we believe they may be surmountable.

### References

- <sup>1</sup> "Flight Control 2000," Air Force Wright Aeronautical Laboratories, 1988.
- <sup>2</sup> Active Control Systems- Review, Evaluation, and Projections, AGARD Conference Proceedings No. 384, March 1985.
- <sup>3</sup> Miller, W., Sutton, R., Werbos, P., Neural Networks for Control, MIT Press, 1991.
- <sup>4</sup> Kosko, B., Neural Networks and Fuzzy Systems, Prentice Hall, 1990.
- <sup>5</sup> Farrell, J., Goldenthal, W., Govindarajan, K., "Connectionist Learning Control Systems: Submarine Heading Control," *Proceedings of the 29th IEEE Conference on Decision and Control*, 1990.
- <sup>6</sup> Narendra, K., Parthasarathy, K., "Identification and Control of Dynamical Systems Using Neural Networks," *IEEE Transactions on Neural Networks*, Vol. 1, No. 1, March, 1990.
- <sup>7</sup> Narendra, K., Mukhopadhyay, S., "Intelligent Control Using Neural Networks," *Proceedings of the American Control Conference*, 1991.
- <sup>8</sup> Sugeno, M., ed., Industrial Applications of Fuzzy Control, Elsevier Science Publishers, 1985.
- <sup>9</sup> Barron, R., Abbott, D., Cellucci, R., Blackman, D., "Neural Network Flight Control System Design for High-agility Air Combat," SBIR Phase I Final Technical Report, WL/FIGL, 1991.
- <sup>10</sup> Barron, R., Cellucci, R., Jordan, P., Beam, N., Hess, P., Barron, A., "Applications of Polynomial Neural Networks to FDIE and Reconfigurable Flight Control," *Proceedings of the IEEE National Aerospace Electronics Conference*, 1990.
- <sup>11</sup> Troudet, T., Merrill, W., "Towards Practical Control Design Using Neural Networks," *Proceedings of the International Joint Conference on Neural Networks*, 1991.
- <sup>12</sup> Chiu, S., Chand, S., Moore, D., Chaudhary, A., "Fuzzy Logic for Control of Roll and Moment for a Flexible Wing Aircraft," *IEEE Control Systems Magazine*, Vol. 11, No. 4, June, 1991.

<sup>13</sup>Larkin, L., "A Fuzzy Logic Controller for Aircraft Flight Control," Industrial Applications of Fuzzy Control, Elsevier Science Publishers, 1985.

<sup>14</sup>Scott, R., "Applications of Neural Networks to Adaptive Control," Thesis, Naval Postgraduate School, 1989.

<sup>15</sup>Jorgensen, C., Schley, C., "A Neural Network Baseline Problem for Control of Aircraft Flare and Touchdown," Neural Networks for Control, MIT Press, 1991.

<sup>16</sup>Steinberg, M., DiGiralamo, R., "Applying Neural Network Technology to Future Generation Military Flight Control Systems," *International Joint Conference on Neural Networks*, 1991.

<sup>17</sup>McRuer, D.; Myers, T.; "Advanced Piloted Aircraft Flight Control System Design Methodology," NASA Contractor Report 18726, 1988.

<sup>18</sup>DiGirolamo, R.; Donley, S., "Flight Control Law Synthesis Using Neural Network Theory," NADC-91004-60, 1990.

<sup>19</sup>Heffley, R., "Outer-Loop Control Factors for Carrier Aircraft," NAVAIR Report No. RHE-NAV-90-TR-1, 1990.

<sup>20</sup>Steinberg, M., "Development of a Fuzzy Logic Automatic Carrier Landing System," preprint.

<sup>21</sup>Steinberg, M., "Using Neural Networks to Implement Complex Digital Control Laws," preprint.

<sup>22</sup>Urnes, J., "Flight Demonstration of the Self-Repairing Flight Control System in a NASA F-15 Aircraft," *IEEE National Aerospace Electronics Conference*, 1990.

<sup>23</sup>Smith, J., Walters, R., "Application of an Adaptive Clustering Network to Flight Control of Advanced Fighter Aircraft," NADC Report, in review.

<sup>24</sup>Calvert, J., "Development of an Aircraft Simulation Performance Model for Flight Control System Gain Optimization Using Model Following Techniques," NADC Report, in review.

<sup>25</sup>Albus, J., "A New Approach to Manipulator Control: The Cerebellar Model Articulation Controller," *Journal of Dynamic Systems, Measurement, and Control*, Trans. ASME Series G., Vol. 97, 3, Sept., 1975.

<sup>26</sup>Miller, T.; Glanz, F.; Kraft, L., "CMAC: An Associative Neural Network Alternative to Backpropagation," *Proceedings of the IEEE*, Vol. 78, No. 10, 1990.

<sup>27</sup>Lee, C., "Fuzzy Logic in Control Systems: Fuzzy Logic Controller," *IEEE Transactions on Systems, Man, and Cybernetics*, Vol. 20, No. 2, Mar/Apr 1990.

<sup>28</sup>Leaonard, J., Kramer, M., "Radial Basis Function Networks for Classifying Process Faults," *IEEE Control Systems Magazine*, Vol. 11, No. 3, April 1991.

<sup>29</sup>Millington, P., "Associative Reinforcement Learning for Optimal Control," Thesis, M.I.T., 1991.

<sup>30</sup>Jacobs, R., Jordan, M., "A Modular Connectionist Architecture for Learning Piecewise Control Strategies," *Proceedings of the American Control Conference*, 1991.

<sup>31</sup>Baker, W., Farrell, J., "Learning Augmented Control for High Performance Aircraft," *Proceedings of the AIAA Guidance, Navigation, and Control Conference*, 1991.

<sup>32</sup>Antoniewicz, R., Duke, E., Menon, P., "Flight Test of a Trajectory Controller Using Linearizing Transformations with Measurement Feedback," *Proceedings of the AIAA Guidance, Navigation, and Control Conference*, 1990.

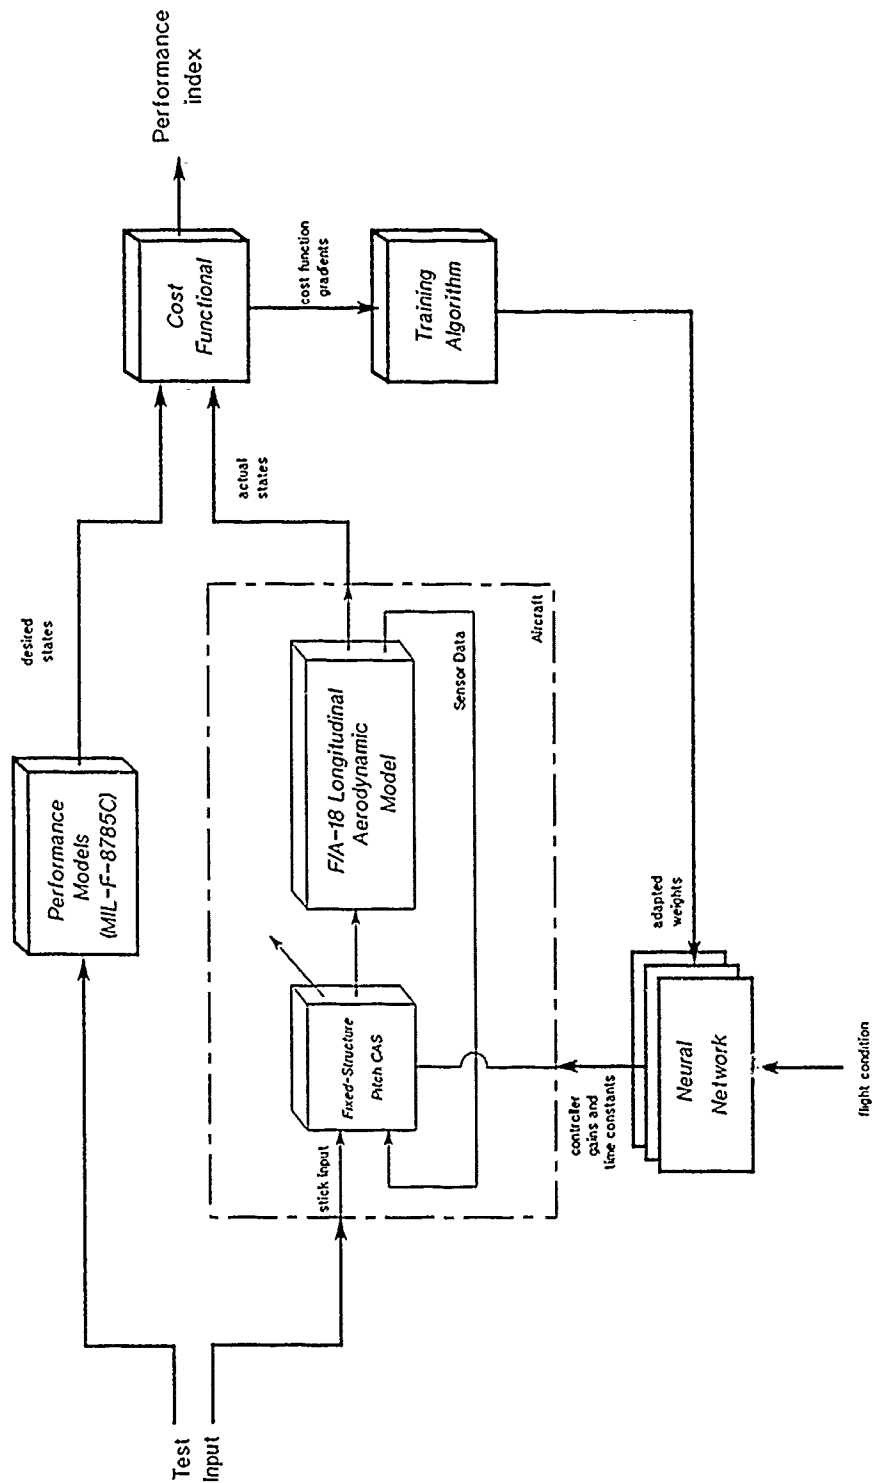


Fig. 1 Control Law Synthesis Method

40,000 ft - 200 knots (CAS) - .68M

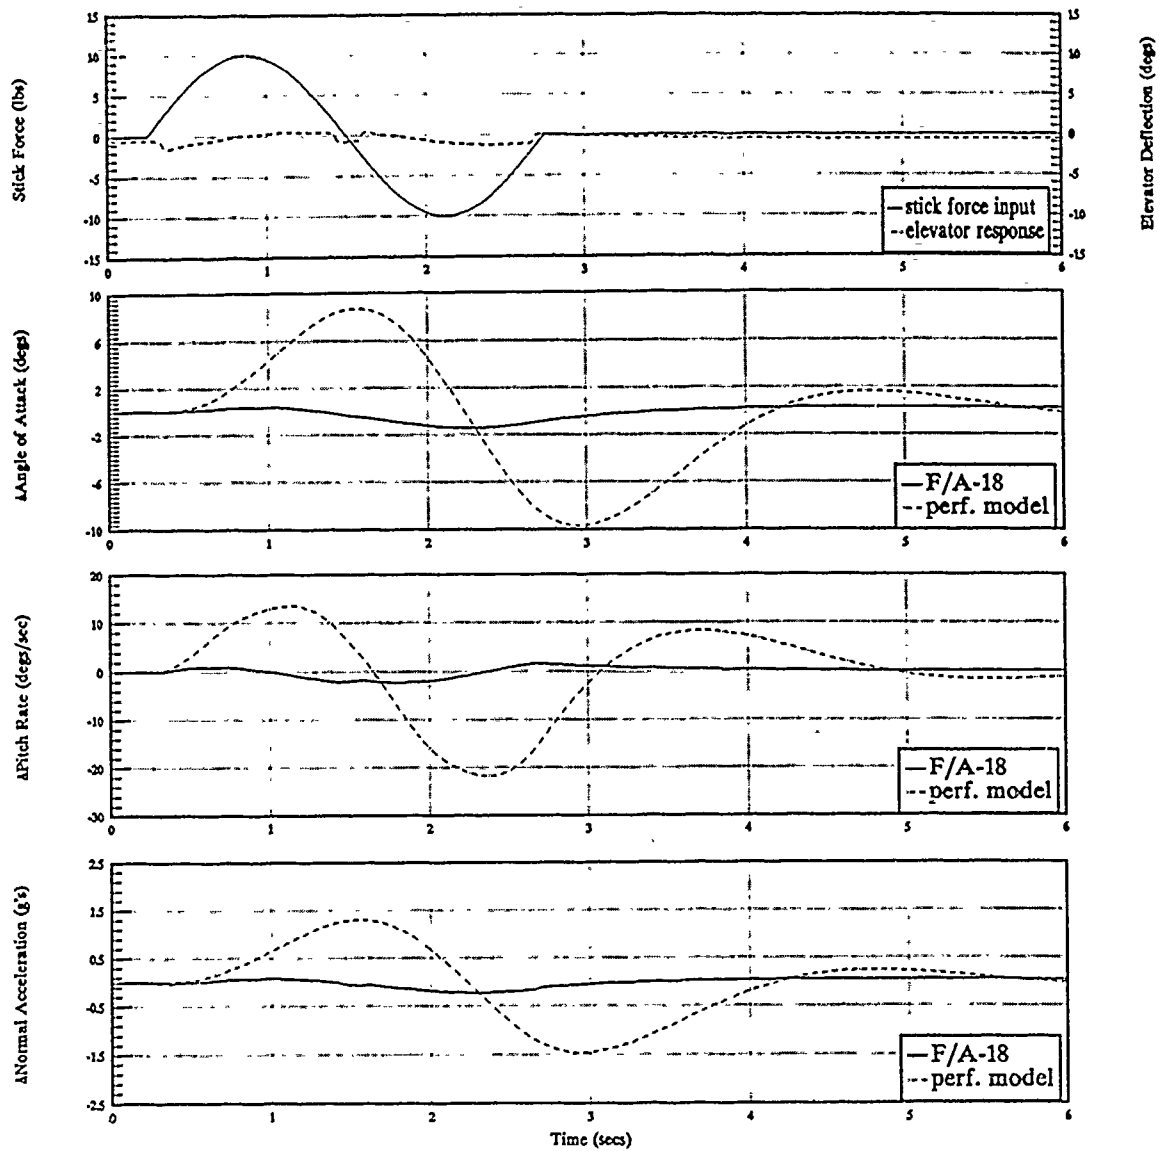


Fig. 2 F/A-18 Responses Before Training

40,000 ft - 200 knots (CAS) - .68M

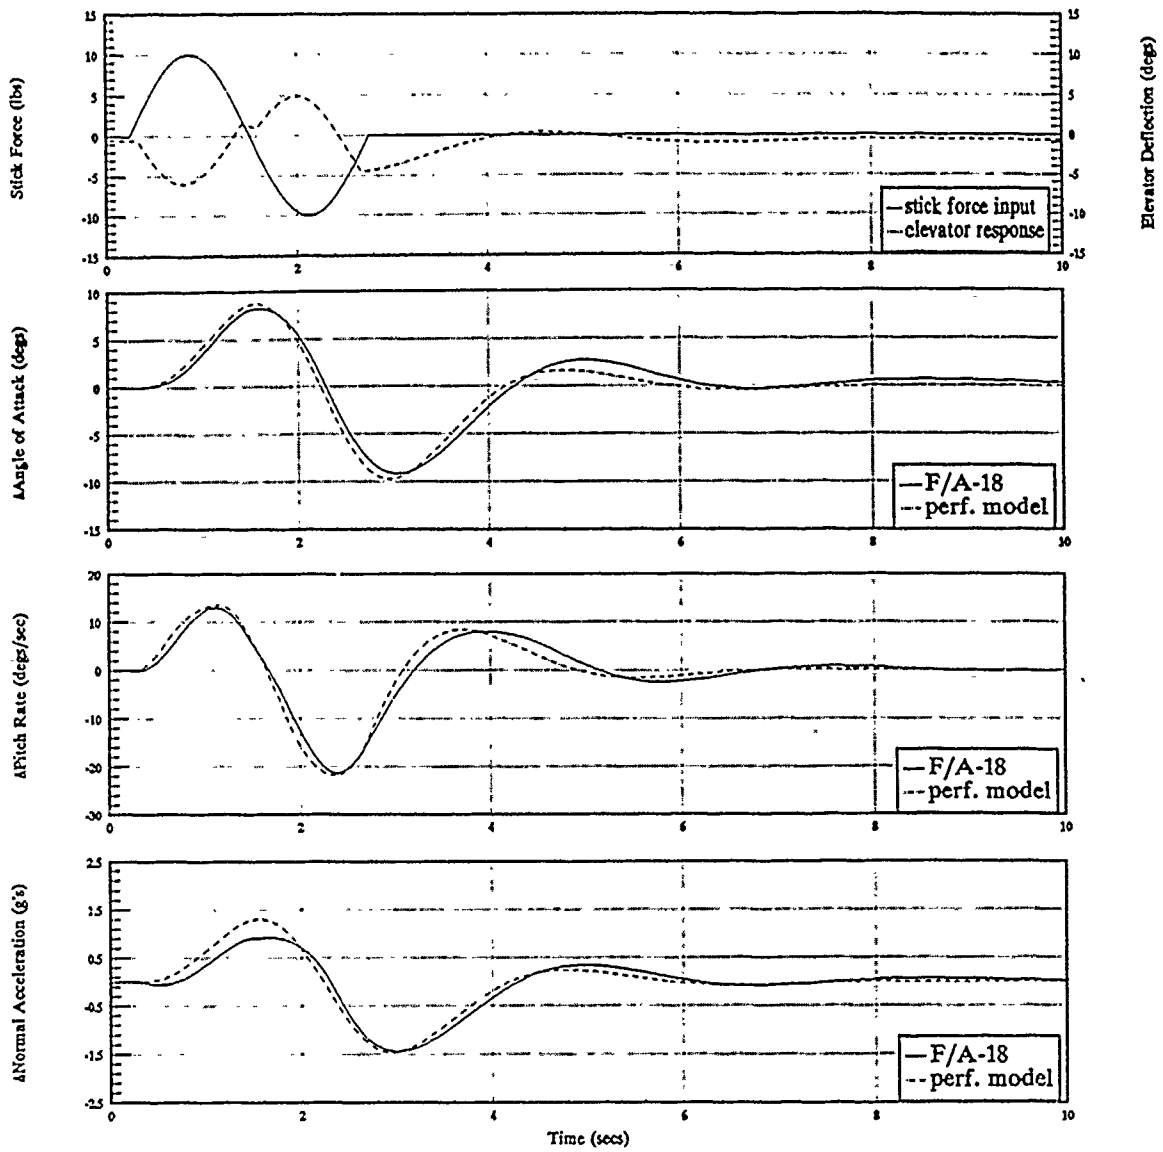


Fig. 3 F/A-18 Responses After Training

20,000 ft - 300 knots (CAS) - .65M

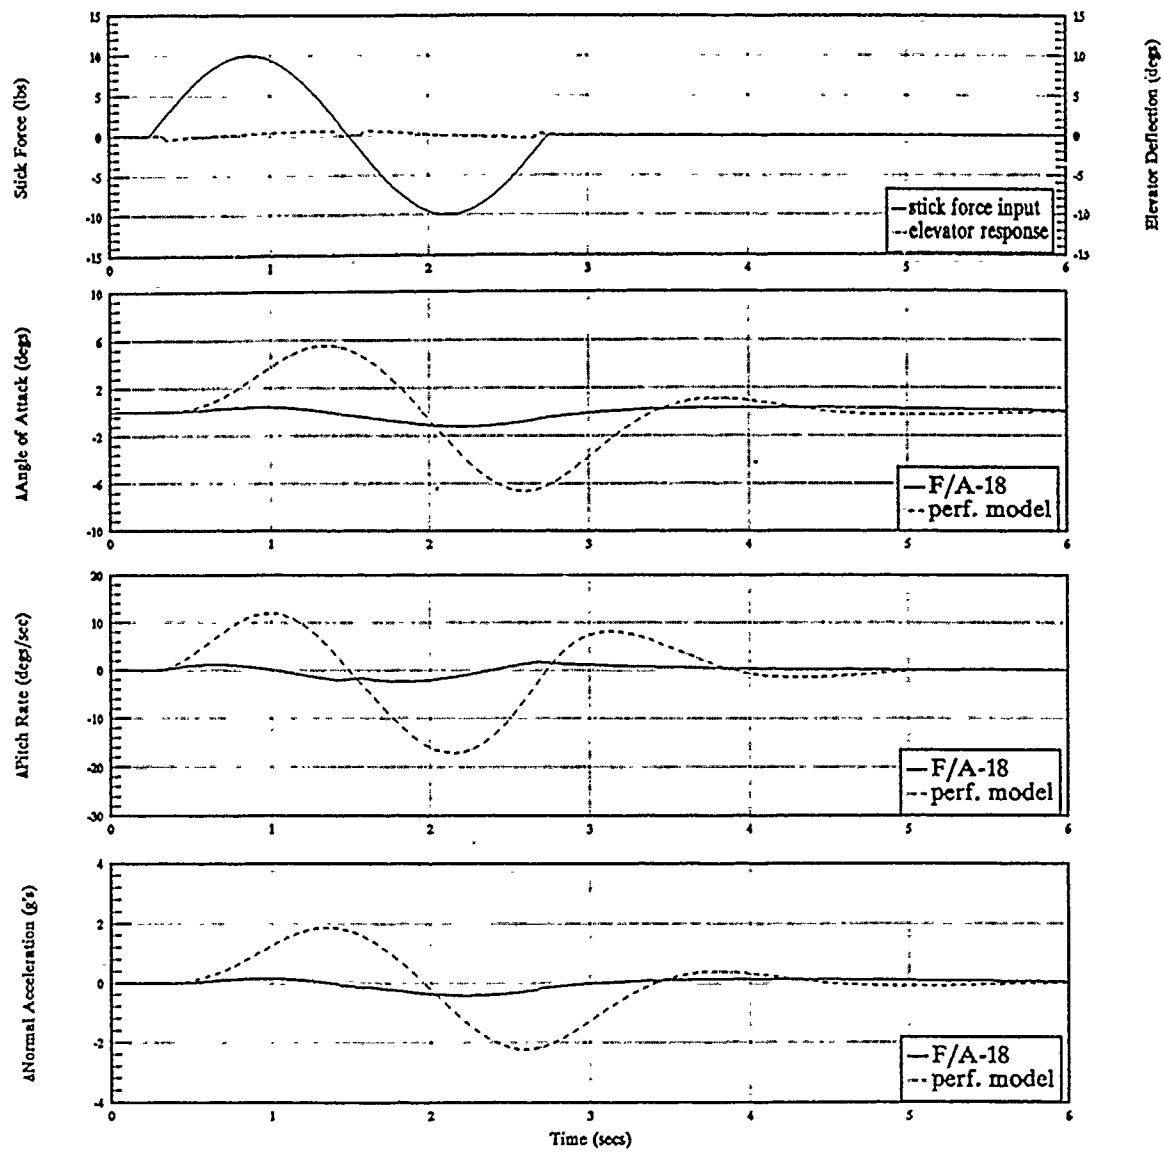


Fig. 4 F/A-18 Responses Before Training

20,000 ft - 300 knots (CAS) - .65M

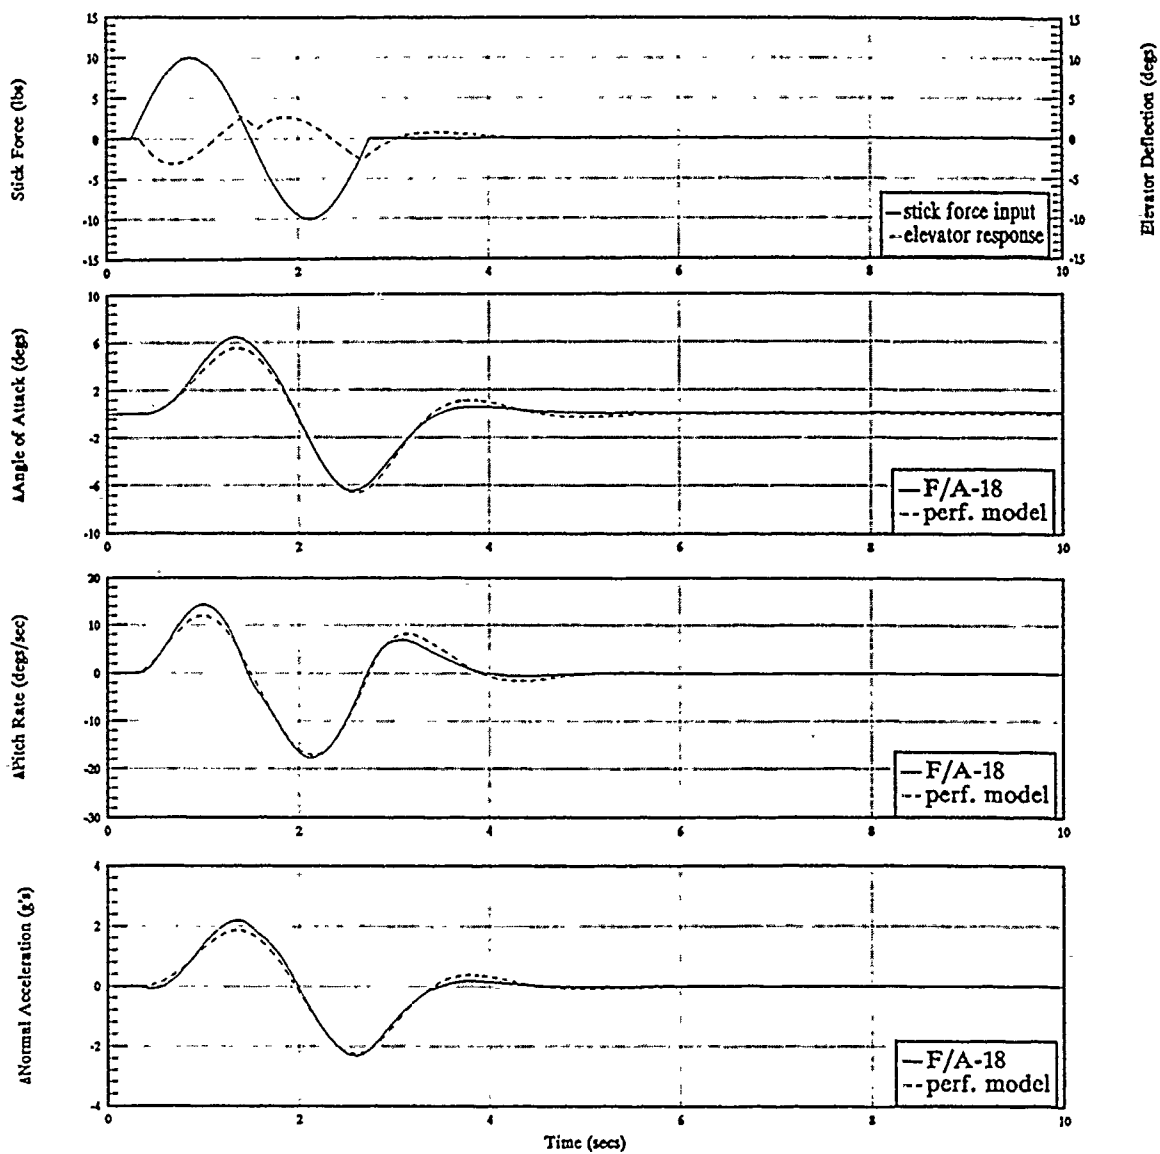


Fig. 5 F/A-18 Responses After Training

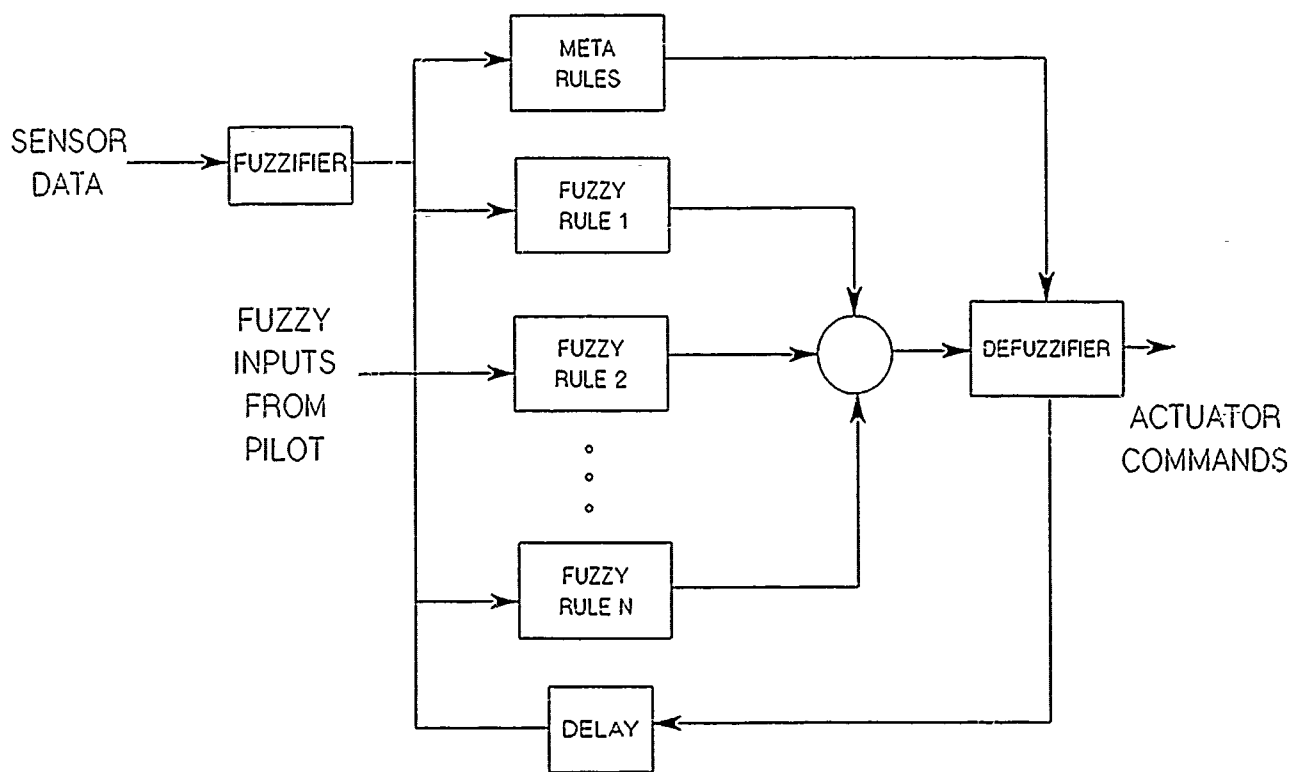


Fig. 6 Fuzzy Logic Carrier Landing System

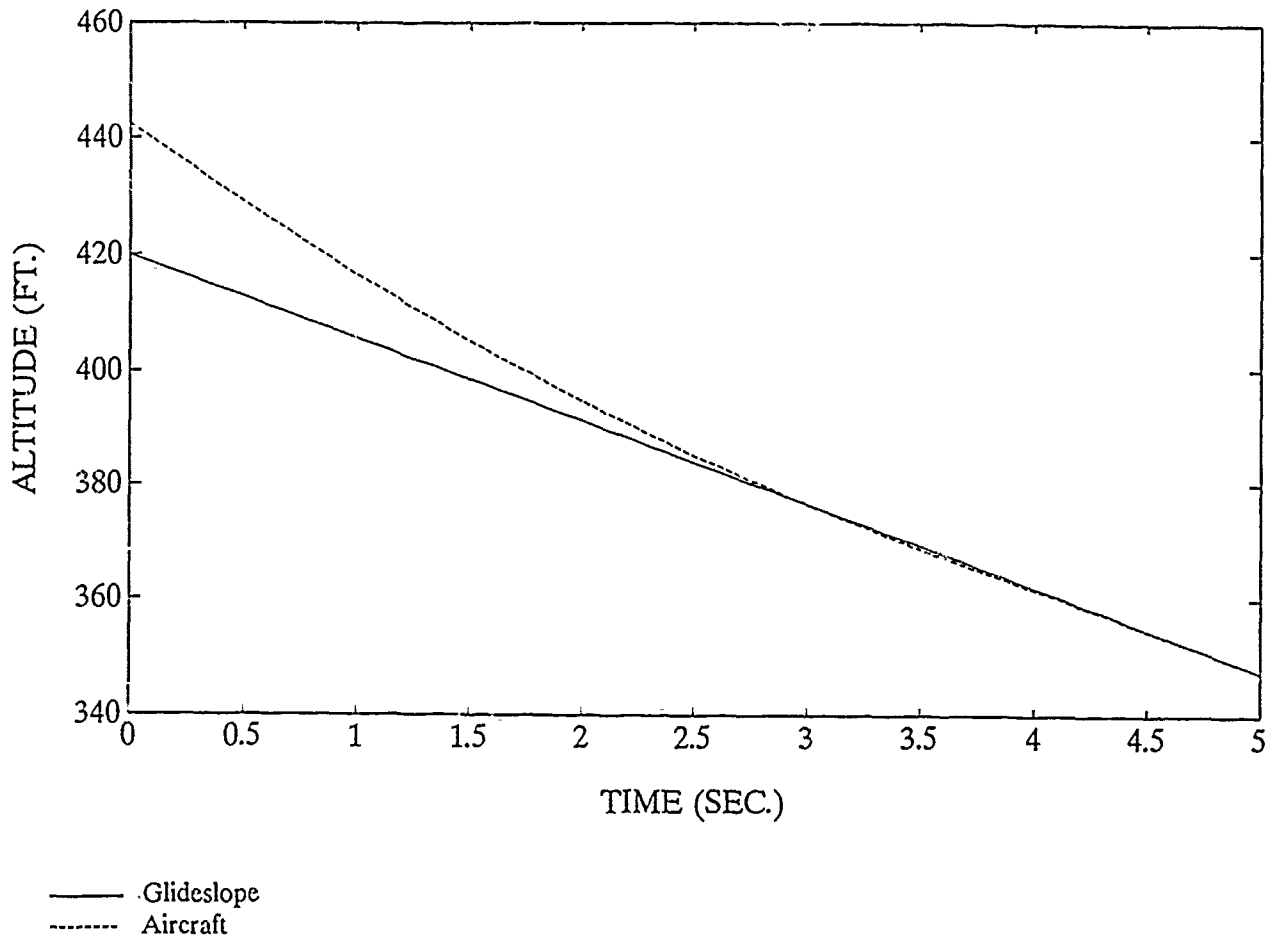


Fig. 7 Position Response to High Slope and Fast Sink Rate

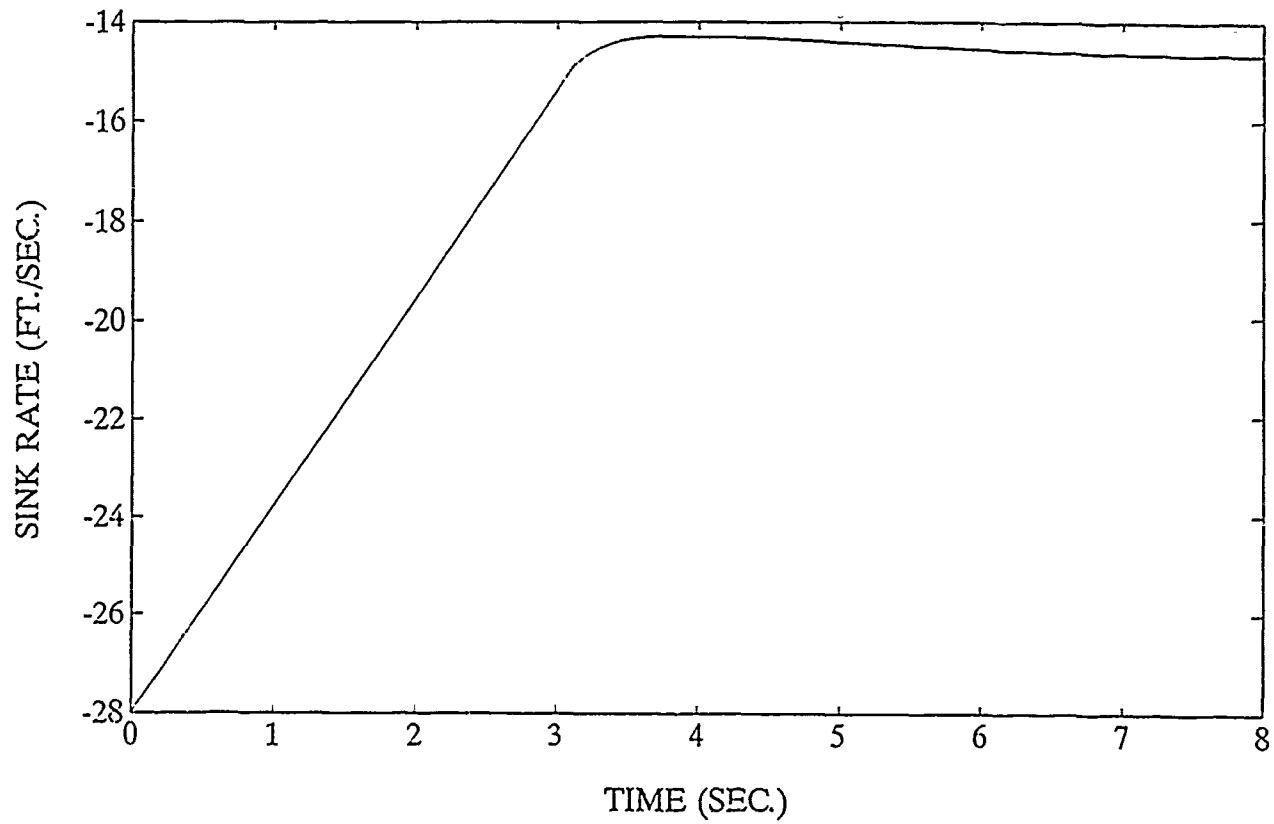


Fig. 8 Sink Rate Response to High Slope and Fast Sink Rate

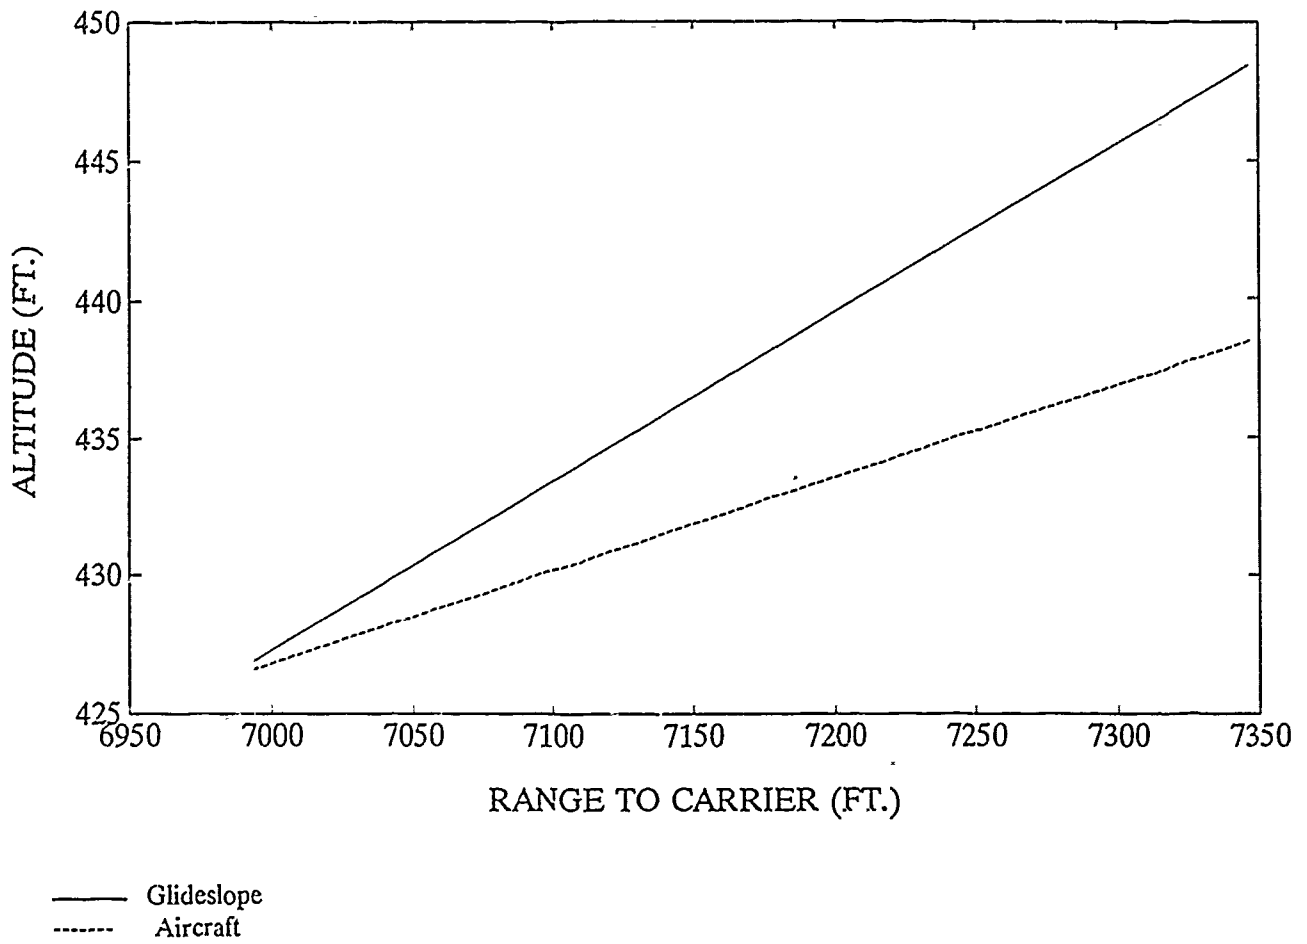


Fig. 9 Response to Slightly Low and Far from Carrier

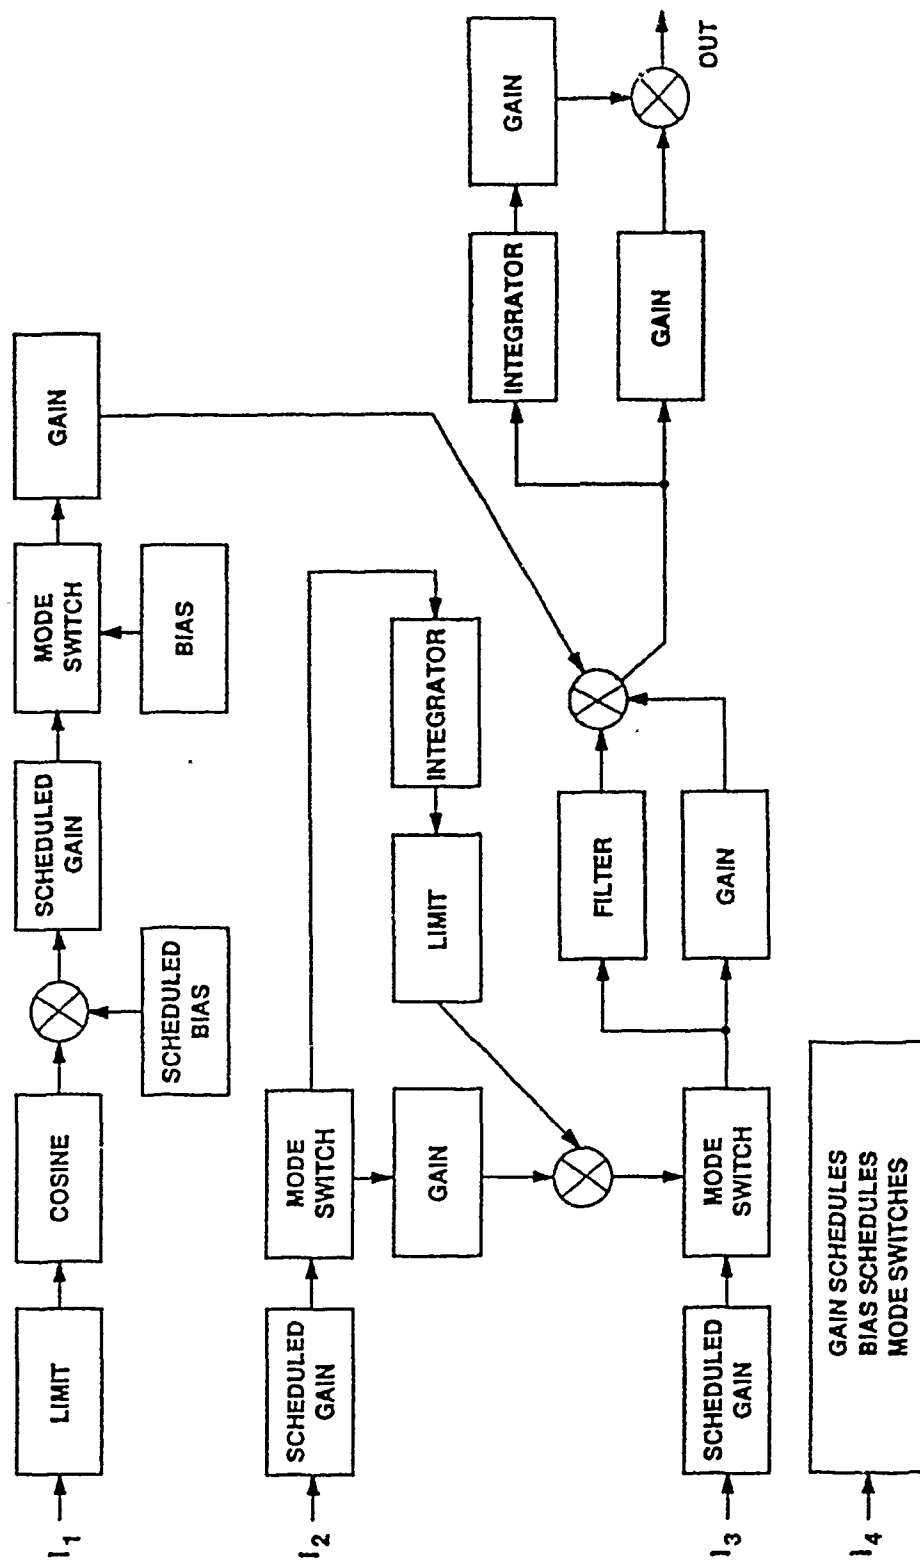


Fig. 10 Representative Control System

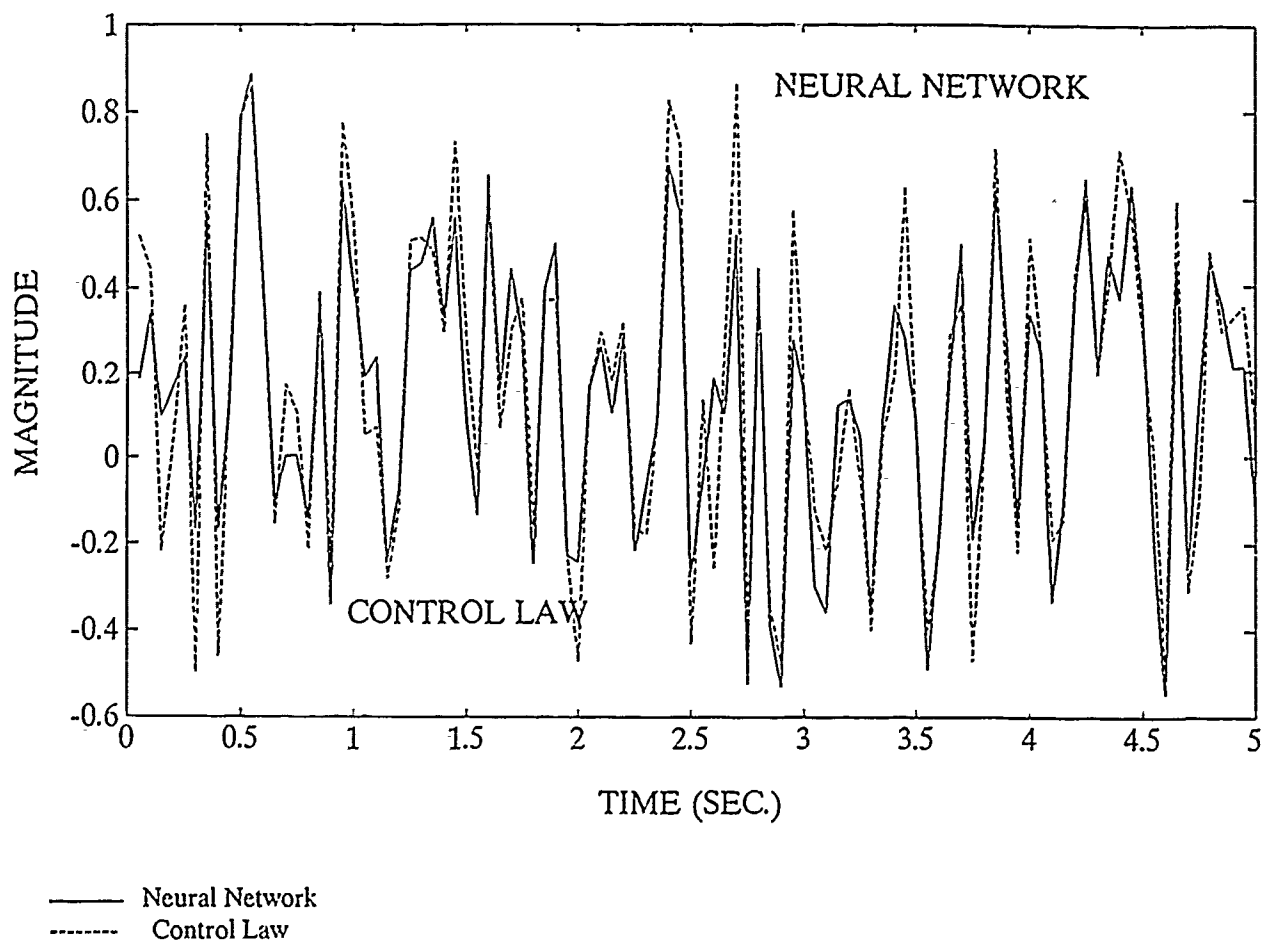


Fig. 11 Emulator Response for Uncorrelated Random Inputs

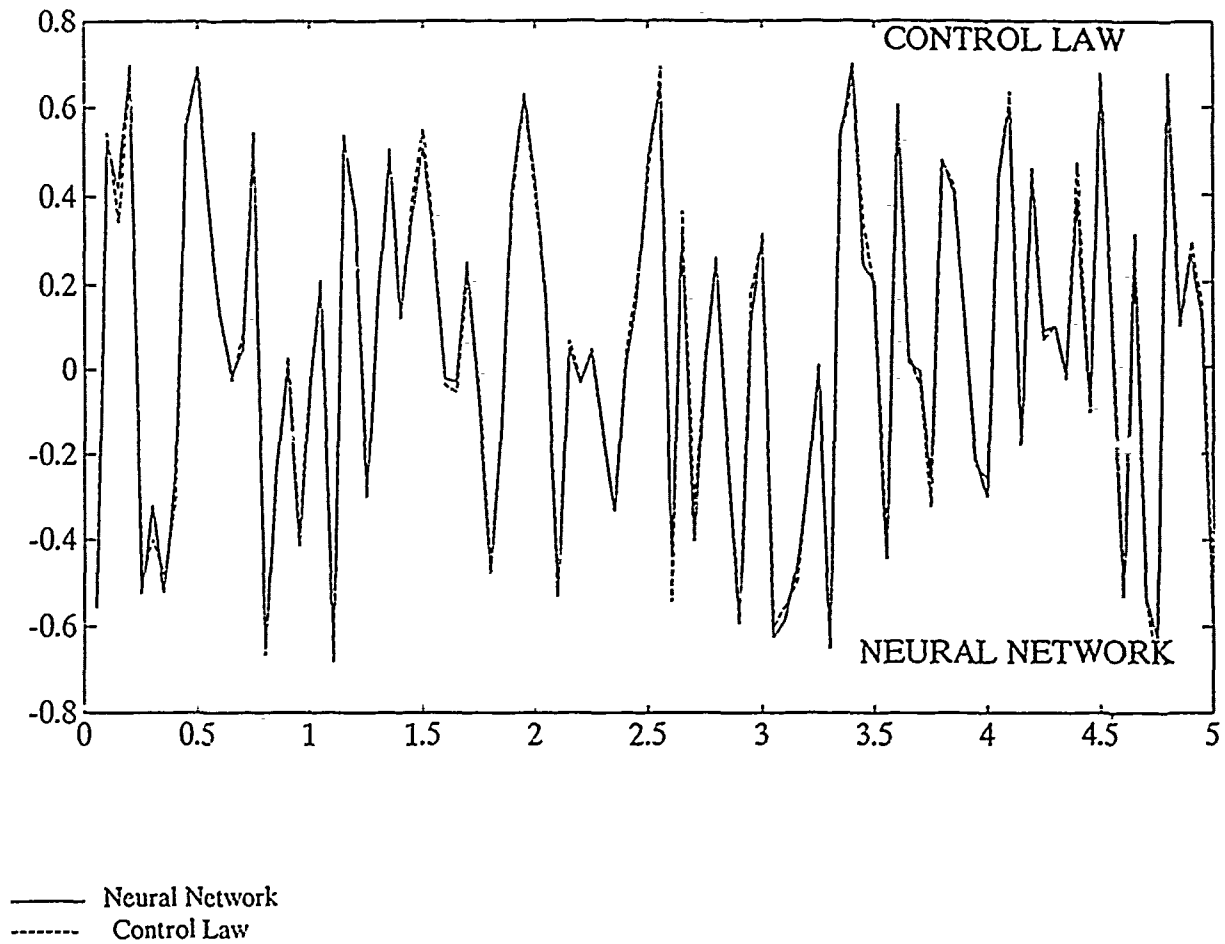


Fig. 12 Emulator Response for Internal Variable

Dept. of Mech. & Aerospace Engr.....1  
 Princeton University  
 Princeton, NJ 08544  
 Attn: Dr. Robert Stengel

Center for Systems Science.....1  
 Yale University  
 New Haven, CT 06520  
 Attn: Dr. K. Narendra

Dept. of Elec. & Comp. Engr.....1  
 University of New Hampshire  
 Durham, New Hampshire 03824  
 Attn: Dr. T. Miller

Dept. of Elec. Engr.....1  
 University of Southern California  
 Los Angeles, CA 90089-0272  
 Attn: Dr. B. Kosko

Dept. of Comp. & Information Sciences.....1  
 University of Massachusetts  
 Amherst, MA 01003  
 Attn: Dr. A. Barto

Dept. of Brain & Cognitive Sciences.....1  
 Massachusetts Institute of Technology  
 Cambridge, MA 02139  
 Attn: Dr. M. Jordan

Dept. of Elec. & Comp. Engr.....1  
 Drexel University  
 Philadelphia, PA 19104  
 Attn: Dr. A. Guez

NAVAIRDEVCCEN.....55  
 Attn: Library 8131 (5)  
 Attn: Mr. M. Steinberg 6012 (50)

Cambridge, MA 02139  
Attn: Mr. W. Baker

Guided Systems Technology.....1  
430 10th St, NW, Suite N 107  
Atlanta, GA 30318-5769  
Attn: Dr. E. Corban

STR Corporation.....1  
10700 Parkridge Boulevard  
Reston, VA 22091-4356  
Attn: Mr. R. Walters

American GNC Corporation.....1  
9131 Mason Ave.  
Chatsworth, CA 91311  
Attn: Dr. C. Lin

Robicon Systems.....1  
301 N. Harrison St.  
Suite 242  
Princeton, NJ 08540  
Attn: Dr. S. Lane

Applied Physics Lab.....1  
Johns Hopkins University  
Johns Hopkins Road  
Laurel, MD 20707  
Attn: Mr. David Yost

Dept. of Mechanical & Aero Engineering.....1  
Arizona State University  
Tempe, AZ 85287-6106  
Attn: Dr. Dave Schmidt

School of Aeronautics and Astronautics.....1  
Purdue University  
West Lafayette, IN 47907  
Attn: Dr. D. Andrisani

School of Aerospace Engineering.....1  
Georgia Institute of Technology  
Atlanta, GA 30332  
Attn: Dr. A. Calise

Dept. of Aeronautics and Astronautics.....1  
Stanford University  
Stanford, CA 94305  
Attn: Dr. Robert Cannon

The University of Kansas.....1  
2004 Learned Hall  
Lawrence, KS 66045  
Attn: Dr. J. Roskam

Collins Rockwell International.....1  
 400 Collins Road, N.E.  
 Cedar Rapids, IA 52406

GEC Avionics.....1  
 1375 Kettering Tower  
 Dayton, OH 45423

Lear Siegler, Inc.....1  
 Astronics Division  
 3400 Airport Ave.  
 P.O. Box 442  
 Santa Monica, CA 90406  
 Attn: Mr. Dale Uyeda

Allied Signal .....1  
 Bendix Flight Systems  
 43 Williams Ave.  
 Teterboro, NJ 07608

Systems Control Technology, Inc.....1  
 2300 Geng Rd  
 P.O. Box 10180  
 Palo Alto, CA 94303-0888  
 Attn: Mr. J. Vincent

Barron Associates, Inc.....1  
 Route 1  
 Box 159  
 Stanardsville, VA 22973-9511  
 Attn: R. Barron

Calspan Corporation.....1  
 Flight Research Department  
 Box 400  
 Buffalo, NY 14225

Hamilton Standard.....1  
 Schoephoester Road  
 Winsor Locks, CT 06096

General Electric.....1  
 Aerospace Control Systems  
 P.O. Box 5000  
 Binghamton, NY 13902  
 Attn: Mr. R. Quinlivan

Harris Corp.....1  
 Government Aerospace Systems Division  
 P.O. Box 9400  
 Melbourne, FL 32902

Charles Stark Draper Laboratories.....1  
 555 Technology Square

P.O. Box 7730, M/S:K75-65  
Wichita, KS 67277-7730

Rockwell International.....1  
North American Aircraft Operations  
P.O. Box 90298  
Los Angeles, CA 90009  
Attn: Mr. R. Schwanz (MS GB13)

Rockwell International Science Center.....1  
1049 Camino Dos Rios  
P.O. Box 1085  
Thousand Oaks, CA 91358  
Attn: Mr. S. Chand

General Dynamics Corporation.....1  
Ft. Worth Division  
P.O. Box 748  
Ft. Worth, TX 76108  
Attn: Mr. C. Droste

General Dynamics Pomona Division.....1  
P.O. Box 2507  
Pomona, CA 91769  
Attn: Mr. Walter Waymeyer

General Dynamics Electronics Division.....1  
17436 Ashburton Rd.  
Sand Diego, CA 92128  
Attn: Mr. P. Simpson

Sikorsky Aircraft.....1  
North Main Street  
Stratford, CT 06602

Kaman Aerospace Corp.....1  
P.O. Box 2  
Bloomfield, CT 06002

Bell Helicopter, Textron.....1  
P.O. Box 482  
Ft. Worth, TX 76101

Honeywell Systems & Research Center .....1  
3660 Technology Drive  
Minneapolis, MN 55418  
Attn: Mr. Thomas Cunnungham

Honeywell, Inc.....1  
Defense Avionics System Division  
9201 San Mateo, NE  
Albuquerque, NM 87113-2227  
Attn: Mr. Peter Briggs

Attn: Mr. S. Osder

Douglas Aircraft Company.....1  
3855 Lakewood Blvd.  
Long Beach, CA 90846  
Attn: Mr. John D. McDonnell

Systems Technology, Inc .....1  
13766 S. Hawthorne Blvd.  
Hawthorne, CA 90250

Northrop Corp.....1  
Aircraft Group  
One Northrop Ave.  
Hawthorne, CA 90250-3277  
Attn: Mr. P. Shaw

Lockheed Georgia Co.....1  
Marietta, GA 30063  
Attn: Mr. W. Hargrove

Lockheed Research Laboratory.....1  
3251 Hanover St.  
B284-09110  
Palo Alto, Ca 94304  
Attn: Mr. T. Washburne

Grumman Aerospace Corp.....1  
Bethpage, NY 11714  
Attn: Mr. R. Gran (M/S A08-35)

Grumman Corporate Research Center.....1  
Bethpage, NY 11714-3580  
Attn: Dr. C. Huang

Boeing Aerospace & Electronics.....1  
P.O. Box 3999  
Seattle, WA 98124-2499  
Attn: Q. Mendoza (MS 9Y-18)

Boeing Aircraft Co.....1  
P.O. Box 3707  
Seattle, WA 98124

Boeing Military Airplane Co.....1  
14543 SE 51st Street  
Seattle, WA 98006

Boeing Helicopters.....1  
P.O. Box 16858  
Philadelphia, PA 19142  
Attn: Mr. B. McManus

Boeing Military Airplane Company.....1

## DISTRIBUTION LIST

	No. of Copies
Administrator, Defense Technical Info. Center.....	2
Bldg. No. 5, Cameron Station	
Alexandria, VA 22314	
Director, Office of Naval Technology.....	1
800 N. Quincy St.	
Arlington, VA 22217-5000	
Attn: Mr. W. King	
Commander, Naval Air System Command.....	4
Department of the Navy	
Washington, DC 20361	
Attn: Library (5004) - (2)	
Attn: Mr. J. Rebel (AIR-5301)	
Attn: Mr. H. Agnew (AIR-53014)	
Chief, Office of Naval Research.....	1
800 N. Quincy St.	
Arlington, VA 22217-5000	
Superintendent, Naval Postgraduate School.....	1
Monterey, CA 93940	
Attn: Dr. D. Collins	
Naval Avionics Center.....	1
Indianapolis, IN 46218	
Naval Air Test Center.....	2
Patuxent River, MD 20670	
Attn: Mr. J. Darling (SA-40)	
Attn: Mr. R. Burton (SA-100)	
Naval Weapons Center.....	1
China Lake, CA 93555-6001	
Attn: Dr. D. Burdick	
Commanding General, Army Aviation Systems Command.....	1
St. Louis, MO 63102	
Director, Aeromechanics Laboratory.....	1
U.S. Army (AVRADCOM)	
NASA Ames Research Center	
Moffett Field, CA 94035	
Attn: Mr. D. Key	
Director, NASA Ames Research Center.....	1
Moffett Field, CA 94035	
Attn: Dr. C. Jorgensen (MS 244-4, Code FII)	